


**COMPRESSION BOARD AIR SEAL**  
**MINIMUM 1/2" CDX PLYWOOD OR 7/16" OSB BOARD**  
 A) 2' COMPRESSION BOARD ON BUILDINGS  
 29' OR LESS IN HEIGHT AND INTERNAL PENETRATIONS  
 B) 4' COMPRESSION BOARD ON BUILDINGS  
 30' OR HIGHER OR 90 MPH OR GREATER WIND RIDERS  
 FASTENED WITH #14 ROOF SCREWS AND 2" FLAT WASHERS

- SEPARATOR OPTIONS:**
- 1) 2001 GRAVEL MAT
  - 2) 1/2" GYPSUM LOOSE LAID OR DENS DECK
  - 3) INSULATION MECHANICALLY FASTENED WITH 8 FASTENERS PER 4X8 PANEL AND 4 FASTENERS PER 4X4 TO KEEP FROM BOWING
  - 4) INSULATION LOOSE LAID AND WEIGHTED IN PLACE WITH 1/2" GYPSUM, DENS DECK, OR EQUAL

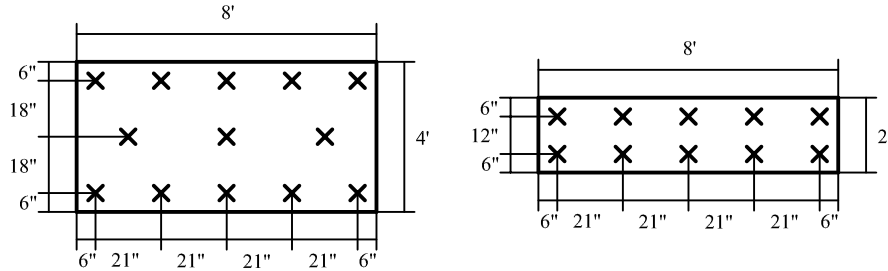

\*FOR WIND RIDER OF OVER 60 MPH, VERIFICATION OF EXISTING ROOF ATTACHMENT TO THE DECK IS REQUIRED. SOME EXISTING ROOFS MAY REQUIRE PERIMETER CORNER AND SUBSTRATE REFASTENING. © Thomas L. Kelly—Patent Pending

**HURRICANE BACKWRAP COMPRESSION BOARD AIR SEAL**  
**UP TO 120 MPH WIND RIDER**

|                    |                        |
|--------------------|------------------------|
| Scale: NTS         | 325 Thomaston Ave.     |
| DWG #: TP-HCB-120  | P.O. Box 2557          |
| Rev. Date: 5/24/11 | Waterbury, CT 06702    |
| Rev. #: 7          | Tele: 1 (800) 537-7663 |