


# HURRICANE BACKWRAP COMPRESSION BOARD AIR SEAL



## UP TO 120 PLUS MPH WIND RIDER \* C-EPDM MEMBRANE

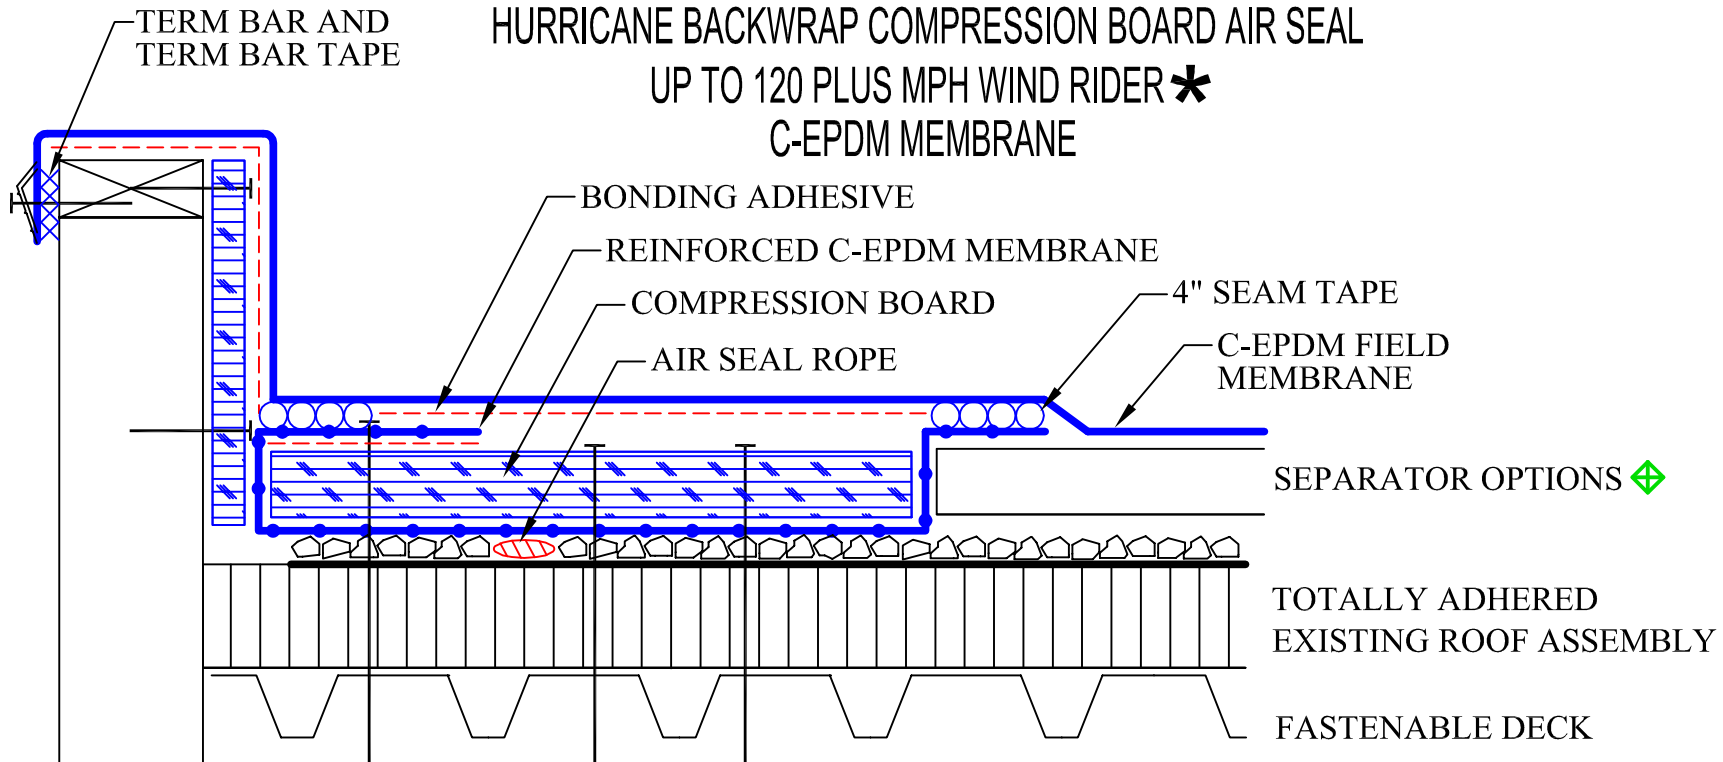

### COMPRESSION BOARD AIR SEAL

**MINIMUM 1/2" CDX PLYWOOD OR 7/16" OSB BOARD**

- A) 2' COMPRESSION BOARD ON BUILDINGS  
29' OR LESS IN HEIGHT AND INTERNAL PENETRATIONS
- B) 4' COMPRESSION BOARD ON BUILDINGS  
30' OR HIGHER OR 90 MPH OR GREATER WIND RIDERS  
FASTENED WITH #14 ROOF SCREWS AND 2" FLAT WASHERS

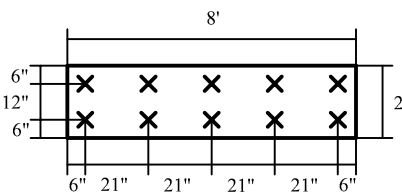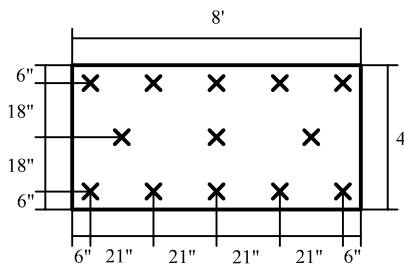

SEPARATOR OPTIONS

TOTALLY ADHERED  
EXISTING ROOF ASSEMBLY

FASTENABLE DECK

### SEPARATOR OPTIONS:

- 1) 2001 GRAVEL MAT
- 2) 1/2" GYPSUM LOOSE LAID OR DENS DECK
- 3) INSULATION MECHANICALLY FASTENED WITH 8 FASTENERS PER 4X8 PANEL AND 4 FASTENERS PER 4X4 TO KEEP FROM BOWING
- 4) INSULATION LOOSE LAID AND WEIGHTED IN PLACE WITH 1/2" GYPSUM, DENS DECK, OR EQUAL

Note: 2001 Co. recommends using reinforced membrane under compression board for ease of workmanship

\* FOR WIND RIDER OF OVER 60 MPH, VERIFICATION OF EXISTING ROOF ATTACHMENT TO THE DECK IS REQUIRED. SOME EXISTING ROOFS MAY REQUIRE PERIMETER CORNER AND SUBSTRATE REFASTENING.

© Thomas L. Kelly—Patent Pending

HURRICANE BACKWRAP COMPRESSION BOARD AIR SEAL  
100 PLUS MPH WIND RIDER

325 Thomaston Ave.	Scale: NTS
P.O. Box 2557	DWG #: CEPDM-HCB-120
Waterbury, CT 06702	Rev. Date: 5/24/11
Tele: 1 (800) 537-7663	Rev. #: 7